

The Brand of Electricity LED CEILING FIXTURE LITE



TECHNICAL SPECIFICATION

INDOOR- LED FIXTURES



Technical data:

Power: 12W; 24W

Rated voltage: 230V; 50-60Hz

■ Colour temp.: 4000K

Power Supply: control gear, DC device-driver

■ LED type: SMD 5730

Light chip: EPISTAR TAIWAN
 Colour rendering index: Ra≥80
 Average Lifetime: 30 000h
 Body: Polycarbonate

Colour of the body: WhiteInstallation: Surface mounting

Protection against dust and moisture: IP40

Protection against electric shock: I

Surface requirements: Class F

Features:

- Completely replace traditional lighting fixtures
- Pleasant and uniform light distribution
- Low power consumption
- Repeated switch on/off does not affect the lifespan
- Safety, low voltage operation
- Instant light with maximum luminous flux
- Environmentally friendly no mercury and lead
- No ultraviolet and infrared rays

TECHNICAL SPECIFICATION


INDOOR- LED FIXTURES



Area of application:

- Residential buildings
- Commercial buildings
- Administrative buildings
- Banks
- Hospitals

Variants and Dimensions:

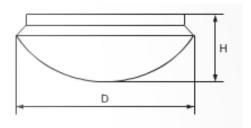

Model	Watt	Whole fixture	Colour	Size (mm)			Catalogue number	Packing (pcs)
		lumens		Length	Width	Height		
LITE	12W	960	white	250	250	100	95LITE12LED	1
LITE	24W	1920	white	350	350	120	95LITE24LED	1


Barcodes:

3800131192745	95LITE12LED
3800131192752	95LITE24LED

TECHNICAL SPECIFICATION





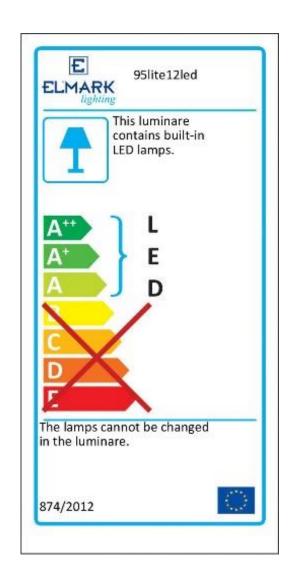

EN 55015 • EN 61000-3-2 • EN 61000-3-3 • EN 61547 • EN 60598-1 • EN 60598-2-2 • EN 61347-1 • EN 61347-2-13 • EN 13032-4

