SRC20ZSX-W,-S SRC25ZSX-W,-S SRC35ZSX-W,-S
SRC40ZSX-W,-S SRC50ZSX-W,-S SRC60ZSX-W,-S SRC63ZR-W,-S

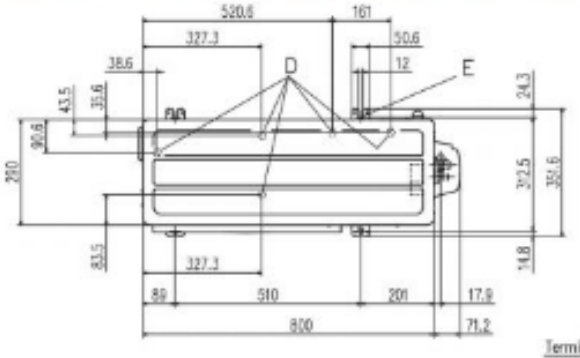

Symbol	Content	
A	Service valve connection (gas side)	20,25,35 φ9.52(3/8") (Flare) 40,50,60,63 φ12.7(1/2") (Flare)
B	Service valve connection (liquid side)	φ6.35 (1/4") (Flare)
C	Pipe/cable draw-out hole	
D	Drain discharge hole	φ20×5places
E	Anchor bolt hole	M10×4places

Minimum installation space

Examples of installation / Dimensions	I	II	III	IV
L1	Open	250	280	180
L2	100	75	Open	Open
L3	100	80	80	80
L4	250	Open	250	Open

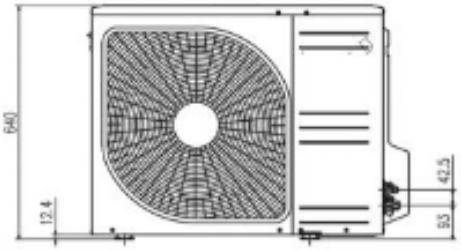





SRK20ZSX-W, -WB, -WT SRK25ZSX-W, -WB, -WT
SRK35ZSX-W, -WB, -WT SRK50ZSX-W, -WB, -WT
SRK60ZSX-W, -WB, -WT

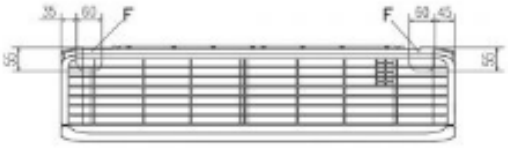

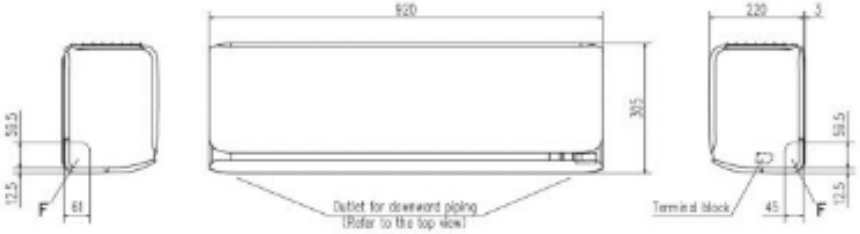

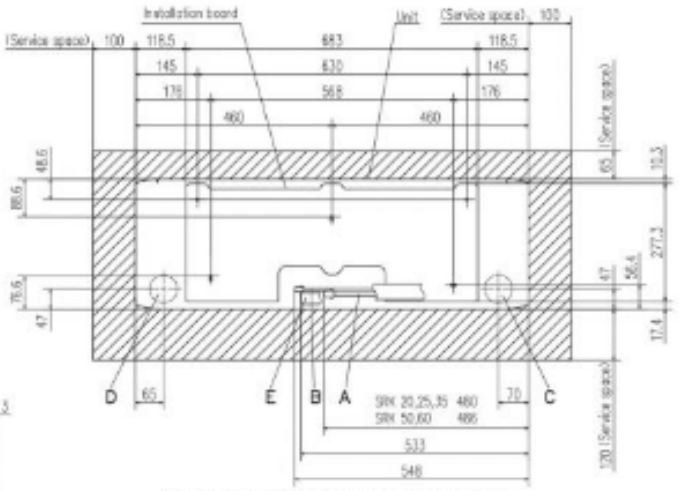

Space for installation and service when viewing from the front

Symbol	Content	
A	Gas piping	SRK 20,25,35 φ9.52 (3/8") (Flare) SRK 50,60 φ12.7 (1/2") (Flare)
B	Liquid piping	φ6.35 (1/4") (Flare)
C	Hole on wall for right rear piping	(φ65)
D	Hole on wall for left rear piping	(φ65)
E	Drain hose	VP16
F	Outlet for piping	