SRC25ZSP-W SRC25ZSP-S SRC35ZSP-W SRC35ZSP-S

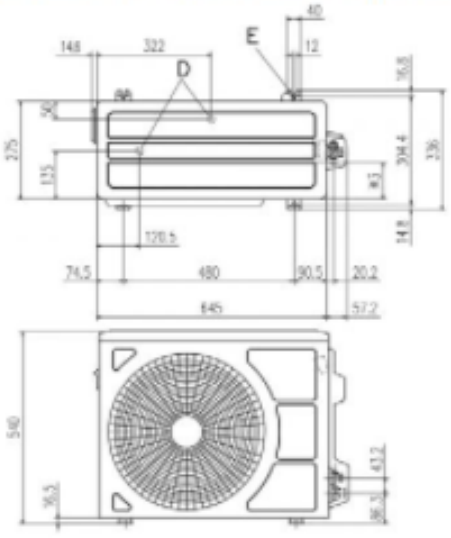

Symbol	Content	
A	Service valve connection (gas side)	ø9.52 (3/8") (Flare)
B	Service valve connection (liquid side)	ø6.35 (1/4") (Flare)
C	Pipe/cable draw-out hole	
D	Drain discharge hole	ø20X2places
E	Anchor bolt hole	M8 X4places

Examples of installation / Dimensions	I	II	III	IV
L1	Open	200	300	100
L2	100	100	Open	Open
L3	100	80	80	80
L4	250	Open	250	Open





Minimum installation space

SRK25ZSP-W SRK35ZSP-W SRK45ZSP-W SRK25ZSP-S SRK35ZSP-S SRK45ZSP-S

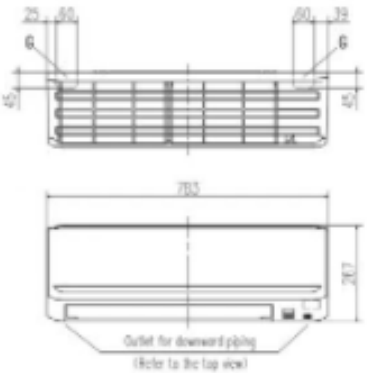

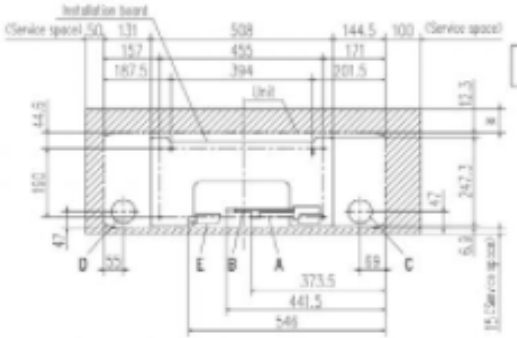

a		
	Service space	65
	Recommendation	80

Space for installation and service when viewing from the front

Symbol	Content		
A	Gas piping	SRK25,35	ø9.52 (3/8") (Flare)
		SRK45	ø12.7 (1/2") (Flare)
B	Liquid piping	ø6.35 (1/4") (Flare)	
C	Hole on wall for right rear piping	ø65	
D	Hole on wall for left rear piping	ø65	
E	Drain hose	VP16	
F	Outlet for wiring		
G	Outlet for piping (on both side)		